

AVR-NSV16P16

16 CH. 4K UHD NETWORK VIDEO RECORDER



H.265 4K UHD NETWORK VIDEO RECORDER

8MP / 5MP / 4MP / 1080P / 960P / 720P

16 PORT POE NVR



FUNCTION

- H.265+ codec decoding
- Max. 112Mbps(16CH) input bandwidth
- Up to 8MP(4K) resolution for preview and playback
- Support to install up to 2 HDDs, max total capacity of up to 32TB
- Full function network remote view via Internet (CMS, IE/Firefox/Chrome, Mac Safari)
- No limitation on adding devices to CMS, max. 128 channels preview (CMSONE)
- Support scan P2P QR code to connect DVR via Mobile app (AVY Mobile One)
- Support to save pictures/video to Dropbox storage (Dropbox)
- Support to save pictures/video to FTP server (built by user)
- VGA/HDMI output up to 4K resolution
- Support HDD S.M.A.R.T. Monitoring
- NDAA compliant



AVYCON[®]

Copyright © AVYCON. All rights reserved. Specifications and pricing are subject to change without notice.

AVR-NSV16P16

16 CH. 4K UHD NETWORK VIDEO RECORDER




SPECIFICATIONS

DESCRIPTION AVR-NSV16P16

IP Video Input	16 Channels
Output	HDMI x 1: EDID / 3840 x 2160(4K) / 2560 x 1440(2K) / 1920 x 1080 / 1440 x 900 / 1280 x 1024 / 1280 x 720 / 1024 x 768 VGA x 1: 1920 x 1080 / 1440 x 900 / 1280 x 1024 / 1280 x 720 / 1024 x 768
Incoming Bandwidth (Mbps)	112Mbps
Outgoing Bandwidth (Mbps)	96Mbps
Video Compression	H.265+/H.265/H.264+/H.264
Audio Compression	G.711a
Installation Wizard	Yes
Resolution	8MP / 5MP / 4MP / 3MP / 1080P / 960P / 720P:30fps

DIMENSIONS

Unit: inch (mm)

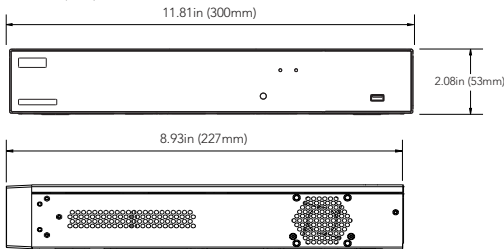

REAR PANEL



AVAILABLE HDD OPTIONS

- 1TB HDD: AVR-NSV16P16-1T
- 2TB HDD: AVR-NSV16P16-2T
- 3TB HDD: AVR-NSV16P16-3T
- 4TB HDD: AVR-NSV16P16-4T
- 6TB HDD: AVR-NSV16P16-6T
- 8TB HDD: AVR-NSV16P16-8T
- 10TB HDD: AVR-NSV16P16-10T
- 12TB HDD: AVR-NSV16P16-12T
- 14TB HDD: AVR-NSV16P16-14T
- 18TB HDD: AVR-NSV16P16-18T
- 24TB HDD: AVR-NSV16P16-24T
- 28TB HDD: AVR-NSV16P16-28T
- 36TB HDD: AVR-NSV16P16-36T

MOBILE APP

AVY Mobile One



Playback Frame Rate	8MP:45fps, 4MP:90fps, 2MP:180fps
Smart AI	Yes
Event Triggers	MD(Sensitivity Level 1~8), Video Loss, Beep, Email, Push Notification to Mobile App
Playback Function	Fast forward / backward (2x, 4x, 8x,16x), Slow forward (1/2x, 1/4x, 1/8x,1/16x)
Playback	Max 16CH playback
Local UI	UI5.0
Web Monitoring	IE10/11, Safari V12.1 above, Firefox V.52 above, Chrome V.57 above, Edge V.79 above
Mobile Viewer	AVY Mobile One
Push Notification	Motion Event, AI, and Abnormal
Password Reset	Factory Reset (Press 10 seconds)
HDD Interface	SATA x 2, Max 32TB HDD (compatible up to 16TB each SATA)
PoE	16 x RJ45, 802.3at/af
Ethernet	1 RJ45 10/100 Base-T
USB	USB 2.0 x 1 (Front Panel), USB 3.0 x 1 (Rear Panel)
Audio	1 IN / 1 OUT
E-Sata	No
RS485	1
Alarm Input/out	8 IN / 1 OUT
OSD Language	English and more
Power Consumption	5W (Without HDD)
Power Supply	DC48V/3.75A
Working Environment	32°~104°F (0°~40° Celcius)
Working Humidity	Less than 90%RH (Non-Condensing)
Dimensions	11.81" x 8.94" x 2.09" (300mm x 227mm x 53mm)



AVYCON[®]

Copyright © AVYCON. All rights reserved. Specifications and pricing are subject to change without notice.

phone: 949-752-7606 / 888-833-4611 (Canada Toll-Free)

email: info@avycon.com

social: @avycon_aivo

website: avycon.com