

AVK-P2500

PTZ CONTROLLER W/ LCD SCREEN



PTZ CONTROLLER W/ LCD SCREEN


PTZ Controller w/ LCD Screen, RS422/RS485, Multiple Protocol, Shortcut Controls, Programmable Transmission Speed, Control up to 255 cameras, Touchpad Mouse, USB, Direct DVR Control with AVR-TA900H, AVR-TH900E, AVR-N9000, AVR-H5600 Series Recorders

The AVYCON AVK-P2500 controls DVR Functions with Touch Pad, controls Camera Functions such as Pan, Tilt, Zoom, and Focus, and Sets and Calls Camera Preset Positions. It also activates Pre-Programmed Group Presets, Tour and Pattern Sequences. The LCD is used to display current status as well as to provide a menu system for setting operational parameters

FUNCTIONS

- Touch Pad Mouse
- Controls up to 255 Cameras
- Multiple Protocol Supported in each Channel
- Low Energy Consuming Keyboard
- RS-485 / RS-422 Communication
- Programmable User Preferences (Preset, Tour, Group, etc.)
- Built-in 3-Axis Proportional Joystick
- Easy Upload of Programmed Data via Serial Communication
- Built-in 2 Lines Character LCD
- User Password Support
- Programmable Transmission Speed for each ID
- Easy to be Integrated with DVR (Key-Code Value Provided)

DIMENSIONS

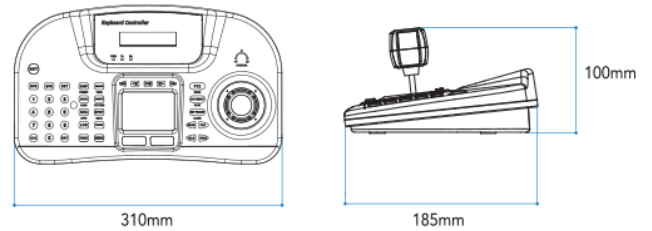

AVYCON[®]

Copyright © AVYCON. All rights reserved. Specifications and pricing are subject to change without notice.

SPECIFICATIONS

GENERAL	
Keyboard Communication	Pan / Tilt / Zoom Interface : RS-485/422 DVR Interface : RS-485 2400 ~ 57600 bps (Selectable) Pan/Tilt Control Distance: 4000 ft (1.2km) on 24 AWG Wire Protocol: Multiple (Including Pelco-D, Total 9 Protocol Support)
COMM. Connector Type	Terminal Block(8p) , TX 3 Port, TRX 1 Port
Key Button	Rubber Button Number (10), Function (23), DVR Control (5)
Joystick	3 Axis Pan / Tilt / Zoom Control, Movement Speed Control
Touch Pad Mouse	USB Mouse Driver , 65.00 x 49.00 mm (Standard Size) Mechanical Buttons : 2 on Module
Power Range	9.5 ~15V DC
Power Consumption	DC12V / 150mA
Display	Character Type 16 Character x 2 Lines LCD
Operation Temperature	0°C to 45°C
Humidity	10% -70% Non-Condensing
Dimensions	310 x 185 x 100 mm

