

AVN-S09-1P08W135G

9 PORT 135W GIGABIT POE SWITCH

9 PORT 135W GIGABIT PoE SWITCH

8+1 Port Network Unmanaged Switch with 8 PoE/PoE+ Gigabit Ports with 1 Uplink Port, Total PoE Budget of 120W




The AVN-S09-1P08W135G is 9 port Gigabit PoE switch with a gigabit SFP uplink port that provides 9 10/100/1000M RJ45 Ports and 8 PoE Ports. The PoE ports can automatically detect and supply power for the IEEE802.3af and IEEE802.3at compliant Powered Devices (PDs), like Voip Phone, PoE APs, IP Phones, IP Cameras, etc. All PoE ports support both IEEE802.3af and IEEE802.3at Standard; each port can output 30W max. Extend Function: Port Lightning protection, Power lightning protection, Solid VLAN.

FUNCTIONS

- IEEE802.3, IEEE 802.3u, IEEE 802.3ab, IEEE802.3z, IEEE802.3af, IEEE802.3at
- 9 10/100/1000Base-TX ports
- 8 PoE Port, each port output 30W max power
- Reliable Power Adapter supply power for both network switch and PoE
- Total Wattage 135W
- 4K entry MAC address table of the PoE switch with auto-learning and auto-aging
- High back-plane bandwidth 18Gbps
- IEEE802.3x Flow control for Full-duplex Mode and backpressure for Half-duplex Mode
- Surge protection for power port and data ports
- Compact metal case for desktop or wall-mounting
- EMI standards complies with FCC, CE class B
- Extend Function: Port Lightning protection, Power lightning protection, Solid VLAN

DIMENSIONS

Unit : inch (mm)

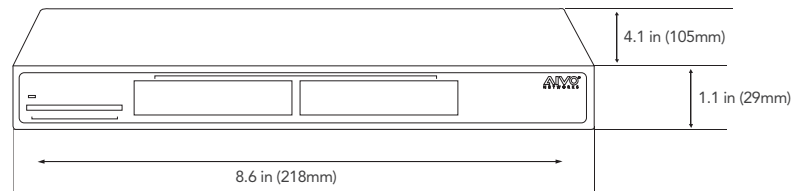

AVYCON[®]

Copyright © AVYCON. All rights reserved. Specifications and pricing are subject to change without notice.

AVN-S09-1P08W135G

9 PORT 135W GIGABIT POE SWITCH

SPECIFICATIONS

DESCRIPTION	
FIXED PORT	9 10/100/1000BASE-TX PORTS
PoE PORTS	8 PoE PORTS (1-8 PORT)
LED INDICATORS	PWR, PoE, LINK/ACT LED
INPUT VOLTAGE	100V~240V AC, 50/60Hz (FOR POWER ADAPTER) 48VDC (FOR SWITCH)
NETWORK STANDARD	IEEE 802.3 10BASE-T IEEE 802.3u 100BASE-TX IEEE 802.3x FLOW CONTROL IEEE 802.3az
NETWORK MEDIA	10BASE-TX: UTP CATEGORY 5, 5e CABLE (≤250m) 100BASE-TX: UTP CATEGORY 5, 5e CABLE (≤150m) 1000BASE-TX: : 148800pps/PORT
TOTAL WATTAGE	135W
OPERATING TEMPERATURE	0°C~40°C. (32°F ~ 104°F)
STORAGE TEMPERATURE	-10°C~70°C. (14°F ~ 158°F)
RELATIVE HUMIDITY	20%~85% (NON-CONDENSING)
THERMAL METHODS	FANLESS
SWITCHING CAPACITY	18G
MAC ADDRESS TABLE	4K
TRAFFIC CONTROL	IEEE 802.3x FULL-DUPLEX FLOW CONTROL
DIMENSIONS	218mm x 105mm x 29mm (W x D x H)
WEIGHT	<2 KG
PACKAGE	AVN-S09-1P08W135G PoE SWITCH USER MANUAL POWER ADAPTER POWER CABLE WARRANTY CARD
PoE PORT	8 10/100/1000BASE-TX PORTS
PoE STANDARD	IEEE802.3af, IEEE802.3at, PER PORT 15.4W, MAX 30W
PIN ASSIGNMENT	V+ (RJ45 PIN1, 2), V- (RJ45 PIN 3, 6)
EXTEND FUNCTION	PORT LIGHTNING PROTECTION, POWER LIGHTNING PROTECTION, SOLID VLAN



AVYCON[®]

Copyright © AVYCON. All rights reserved. Specifications and pricing are subject to change without notice.

phone: 949-752-7606

email: info@avycon.com

social: @avycon_aivo

website: avycon.com