

AVN-S16-2P16W270G-SP

NDA
COMPLIANT | CE | FC

16 PORT 270W Gigabit PoE Switch with 2 1000 Mbps SFP




OVERVIEW

- IEEE802.3af / IEEE802.3at Compliant
- 16 x 10/100/1000Base-TX Ports and 2 x 1000Mbps SFP Ports
- 16 x PoE / PoE+ ports, with each port supporting a 30W max. power output
- Total PoE budget of 243W
- High backplane bandwidth of 36Gbps
- Up to 8K MAC address table size
- IEEE802.3x Flow control
- Industrial standard 19" 1U rack-mountable housing
- Pin Assignment: V+ (RJ45 Pins 1, 2), V- (RJ45 Pins 3, 6)
- EMI standards complies with FCC, CE class B
- Built in Surge protector, for each individual port

DIMENSIONS

Unit : inch(mm)

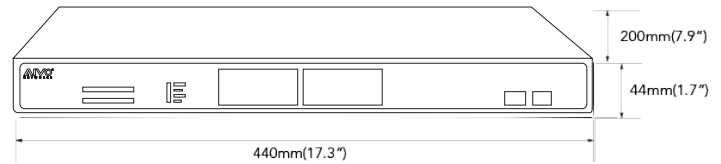

OPTIONAL ACCESSORIES

SPECIFICATIONS

DESCRIPTION	
Fixed Port	16 x 10/100/1000Base-TX ports,
LED Indicators	2 1000 Mbps SFP ports
Input Voltage	PWR, PoE, Link/Act LED
Network Standard	100V ~ 240V AC, 50/60Hz IEEE 802.3 10Base-T IEEE 802.3u 100Base-TX IEEE 802.3x Flow Control IEEE 802.3az
Network Media	10BASE-TX: UTP Category 5/5e Cable (≤250m) 100BASE-TX: UTP Category 5/5e Cable (≤150m) 1000BASE-TX: UTP Category 5/5e Cable (≤150m) Uplink Fiber Port: Single Fiber 20km / 12miles, Double Fiber 20km / 12miles
Total PoE Budget	243W
Operating Temperature	32°F ~ 104°F (0°C ~ 40°C)
Storage Temperature	14°F ~ 158°F (-10°C ~ 70°C)
Relative Humidity	20% ~ 85% (Non-condensing)
Thermal Management	Built-in Noiseless Fan
Switching Capacity	36G
MAC Address Table	8K
Dimensions	440mm x 200mm x 44mm (W x D x H)
Weight	<5Kg (11lb)
Package	AVN-S16-2P16W270G-SP PoE switch User Manual Power Cable
PoE Port	16 10/100/1000Base-TX ports
PoE Standard	IEEE802.3af, IEEE802.3at, per port 15.4W, max. 30W
Pin Assignment	V+ (RJ45 Pin1, 2), V- (RJ45 Pin 3, 6)